


OUTDOOR
Sof'Shield™
 INNOVATIVE SURFACING

OVERALL SPECIFICATIONS

SofShield Outdoor offers superior fall height protection, low maintenance, long wear and accessibility. This innovative unitary surface combines colorful, flexible wear layer mats with a recycled underlayment to create a soft, yet durable unitary surface that provides up to 12 feet of fall height protection and is fully warranted for 6 years.

System Components

Fall Height Protection	Wear Layer Mat	Geotextile Fabric	Sof'Impact Foam Layer(s)
	24" x 24" x 3/4", 5.9 lbs	X*	1 1/2" 2"
1'	X		
4'	X	X*	X
6'	X	X*	X
8'	X	X*	(2)X
10'	X	X*	(2)X
12'	X	X*	(3)X

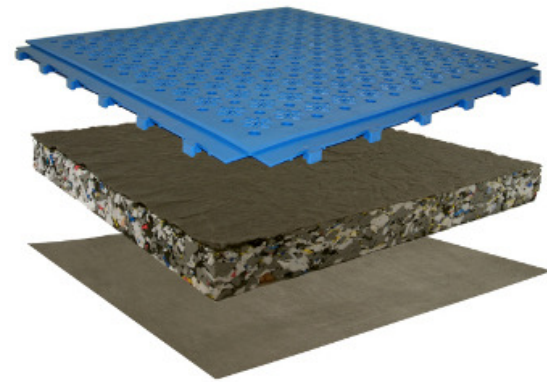

* Fabric recommended for installations over road-base/compacted gravel



Standard Colors



* Custom colors are available.

Certifications

Test Description	Test Ref.	Results
Impact Attenuation	ASTM F-1292-04	<200 GMAX, <1000 HIC
Wear Resistant	ASTM D3884	0.92% loss after 3000 cycles Passed
Slip Resistant	ASTM F-1677	Dry 1.1, Wet 0.81
Tensile Strength	ASTM D412	1434 PSI Passed
Water Flow Rate		30 Gallons/min
Anti-Fungal 500 Hrs	ASTM G-21-96	Passed
UV Resistant	Q Panel 3000 Hrs	<3.0 after 4,032 Kilojoules/sq mt
Non-Toxic	ASTM F-2075-04	Passed
Flammability	ASTM D2859	Passed



Sof'Solutions™
 RECREATION SURFACING